

SPRING TINE HARROWS

The K-Line Mounted Spring Tine Harrow has excellent levelling and trash handling ability.

Long 450mm tines, wide row spacings and easily adjustable tine angles allows quantities of trash to flow more freely through the harrow.

Variable down spring pressure, high performance spring steel and triple wound tines results in excellent levelling of seedbeds.


The large range of spring tine harrows available ensures there is a spring tine harrow to suit a very wide variety of soil conditions and working methods.



FEATURES


- ✓ High performance spring steel tines – increased working life
- ✓ Triple wound tines – designed for less side movement (i.e. better levelling)
- ✓ Wide row spacings – improved trash flow
- ✓ Adjustable tine angles and down spring pressure – flexibility in the field
- ✓ High lift position for transport & ‘fold under’ tines for reversing & turning
- ✓ 1075 series 4 row spring tine harrow has 21.3 tines per metre – this gives exceptional soil levelling and seedbed conditioning
- ✓ Optional quick hitch attachments

SPRING TINE HARROWS SPECIFICATIONS

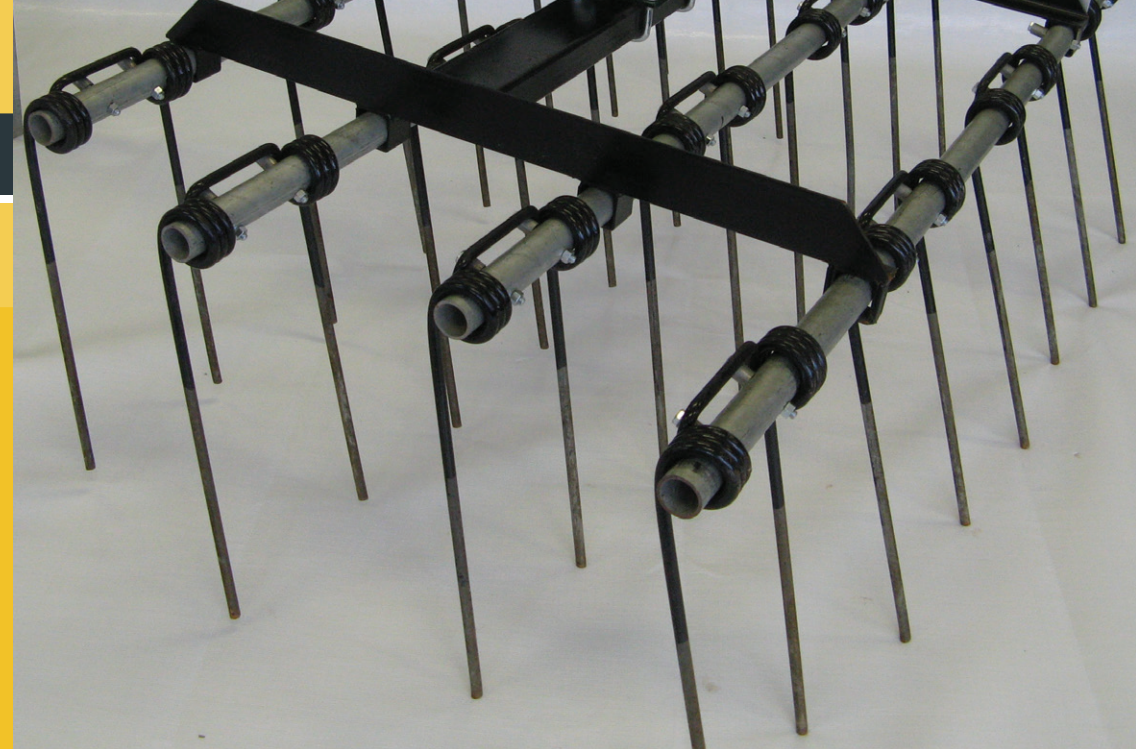


1000 SERIES SPRING TINE MOUNT ARM

- Part No: MST158
- 75mm SHS boom
- To suit 100mm SHS frame
- 8mm folded head
- 20mm greasable pivot
- Adapters for 75mm SHS frame
- Transport adjuster standard
- 1.0, 1.1, 1.3m lengths available
- Quick hitch unit option

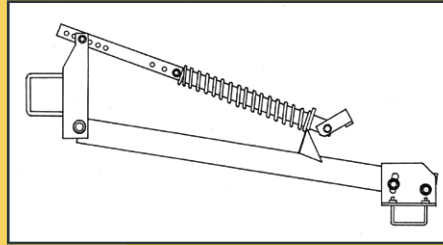

1090 SERIES SPRING TINE HARROW SECTION

- 10mm high performance spring steel
- 228mm tine leg spacing
- 450mm tine length

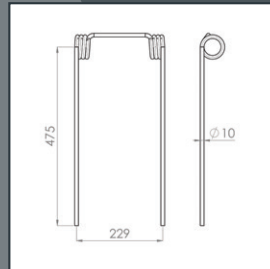

	3 ROW		4 ROW	
Part Number	9-3ST45	9-3ST60	9-4ST45	9-4ST60
Width of cut	1.37 m	1.83 m	1.37 m	1.83 m
Tine action / metre	13.1	13.1	17.5	17.5
No. Mount arms std	1	1	1	1

1290 SERIES HEAVY DUTY SPRING TINE HARROW

- 12.7mm high performance spring steel
- 228mm tine leg spacing
- 450mm tine length
- ALSO AVAILABLE – Jumbo harrows with 16mm tines

The manufacturer reserves the right to change construction and specifications without prior notice or obligation

	3 ROW		4 ROW	
Part Number	H3ST45	H3ST60	H4ST45	H4ST60
Width of cut	1.37 m	1.83 m	1.37 m	1.83 m
Tine action / metre	13.1	13.1	13.1	13.1
No. Mount arms std	1	2	2	2

