



SPEEDTILLER[®]
By K-Line Ag

The 3E's

- ✓ Efficient seedbed preparation
- ✓ Effective weed control
- ✓ Excellent stubble incorporation



Sustaining Farms to Sustain the World

FREE CALL: 1800 194 131
www.k-line.net.au
sales@k-line.net.au

The Speedtiller® by K-Line Ag is a high-performing dual purpose disc-tilling machine used for soil conditioning with superior penetration. It can efficiently cut, size and incorporate high levels of crop residue increasing the carbon content in your soil. Soil erosion from wind and water is drastically reduced by the Speedtiller's excellent incorporation ability.



The Speedtiller® handles heavy residue with ease, moves the dirt of an offset, and is an excellent finishing tool for levelling and one pass seedbed preparation.

Its ability to operate under extreme conditions – with a simple, robust and advanced design puts it in a class of its own.

Digs like a disc, finishes like a finisher – the only true dual purpose tool!



Features

What it means for you

Lateral Disc Gang Adjustment

On heavy duty machines, this is a prime feature of the K-Line Speedtiller®

Ease of operation – this feature gives Speedtiller® operators the ability to adjust for:

- Removing undisturbed ridges in the soil profile
- Chopping excessive root masses
- Increased weed kill
- Better mulching
- Disc wear compensation

Bearing Position: all bearings located behind the disc

Maximises trash flow
Gives longer bearing life

Heavier weight per disc

Gives better penetration for effective one-pass operation
Low disc replacement cost

High density rubber torsion system on disc arms

Each disc jumps separately for superior working in rough terrain and stony soils

Standard disc size 22" (Optional 24" disc)

Optional larger disc digs deeper and lasts longer

Combination of weight, disc angle and bearing position

Gives you the ability to cultivate
a) At deeper depths, with superior trash handling or;
b) At shallower depths, for surface mulching

Range of roller options available

Roller options to suit all soil types, giving your seedbed a level finish

Simplicity of design when folding

Easy to fold, ideal for broadacre farming operations

Grease points for roller bearings only

Minimises service time

Disc Arms – high capacity bearings combined with a multi-sealed labyrinth system

Gives long service life and no greasing

Operating widths 1.75m – 8.5m

Options for all size farming operations





The Power of Strategic Tillage

- Cut, size and mix your crop residue to increase humus levels in your soil, for better crops and higher yields
- Residue incorporation reduces wind and water erosion
- Beat the issue of chemical resistant weeds
- *Keep your soil in shape with a strategic till!*

“This machine, I believe, has no competition in Australia. Its design, strength, weight and build quality is exceptional. K-Lines dedication to improvement, customer service is a road many could follow. The Speedtiller has done everything that I have expected, from heavy stubble incorporation, light tillage preparation, weed control, to level seed bed preparation and deep tillage work. It is simple to operate, definitely requires more horse power than you think and covers a lot of area quickly.”

Dave Noakes

Vineyard

Developed specifically for inter row vineyard cultivation, this model is ideal for cover crop seedbed preparation and as a one pass weed management solution.

Sizes available: 1.75 – 2.25m



“It’s a great machine. It’s cut my costs down; usually to work up my property it costs me about \$25000 on diesel, where it’s brought it back to probably say \$2000. Time saving, where I’d need a worker to sit on two tractors to rip it all up I can go and do it on my own, one hour I can do, say 30 acres...dry ground, hard ground, doesn’t seem to be a problem for it. It just seems to bite in & do its job, you know...very easy to work, maintenance free, at the end of the day it’s what you want.”

Cossy Marciano - Owner of a 1.75m Speedtiller





“The K-Line Speedtiller® is the best machinery purchase I have made and it is truly a work horse when it comes to any tilling.

I wouldn't be without it!”

Graeme Roxburgh - Owner of a 3m Three Point Linkage Speedtiller®



3 Point Linkage

For the row crop, horticulture and small farmer grazier industries, the 3 Point Linkage model combines all the signature Speedtiller features in a compact, cost effective option. Heavy duty, robust and reliable, this model comes in a range of sizes to accommodate your particular tractor size.

Sizes available: 1.75 – 5.5m



Universal

Ideal for the farmer grazier for field preparation, this Speedtiller model is the answer for all your primary and secondary tillage requirements. This machine can be operated in 3 Point Linkage or Trailing configuration.

Sizes available: 2.5m – 4m



Trailing

Acclaimed as the king of medium-sized high speed discs, this model is excellent for primary and secondary tillage applications for the medium to broadacre scale farmer. This advanced design includes a user friendly, easy to operate hydraulic fold feature for safe, easy road transport.

Sizes available: 4m – 8.5m





This machine does an exceptional job, leaves the cultivated area nice and level, is very strong and easy to maintain. I would thoroughly recommend these machines and class them as the best on market."

John Marsh - Owner of a 4m Trailing Speedtiller®



“We were looking for an implement that would level out the ground (sheep tracks/ruts where sheep camp), leave the trash (stubble or medic vine) and kill some snails. The Speedtiller does all of this. K-Line were great to deal with and their willingness to bring a demo over to trial convinced us to purchase. It is very well built and robust and we look forward to using this one pass implement in years to come.”

David and Gavin Reade, Curramulka, SA
Owners of 9m Speedtiller®

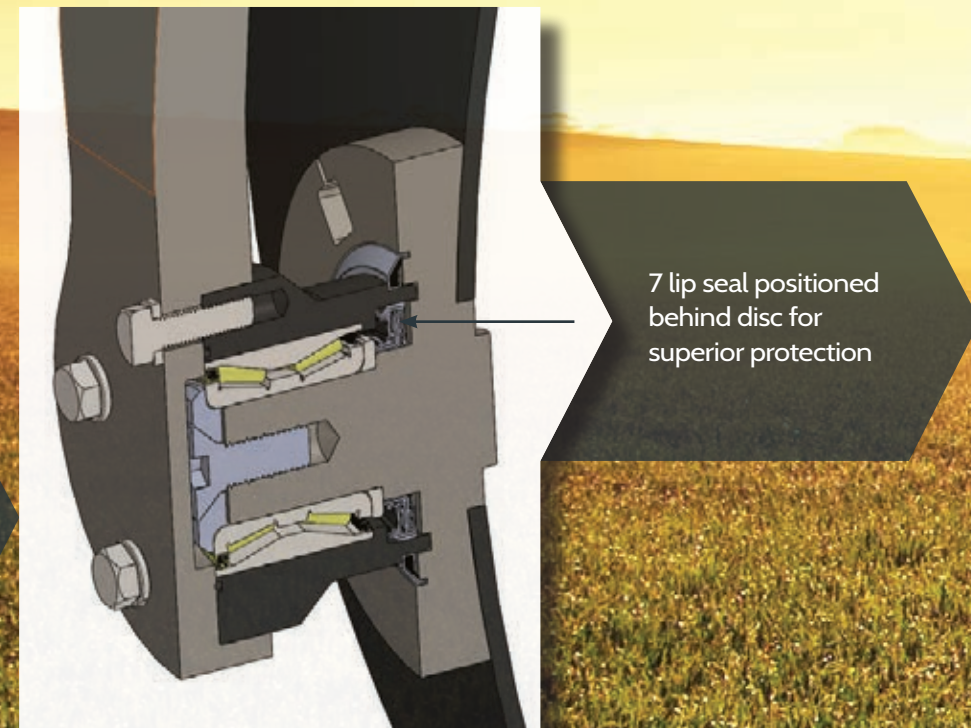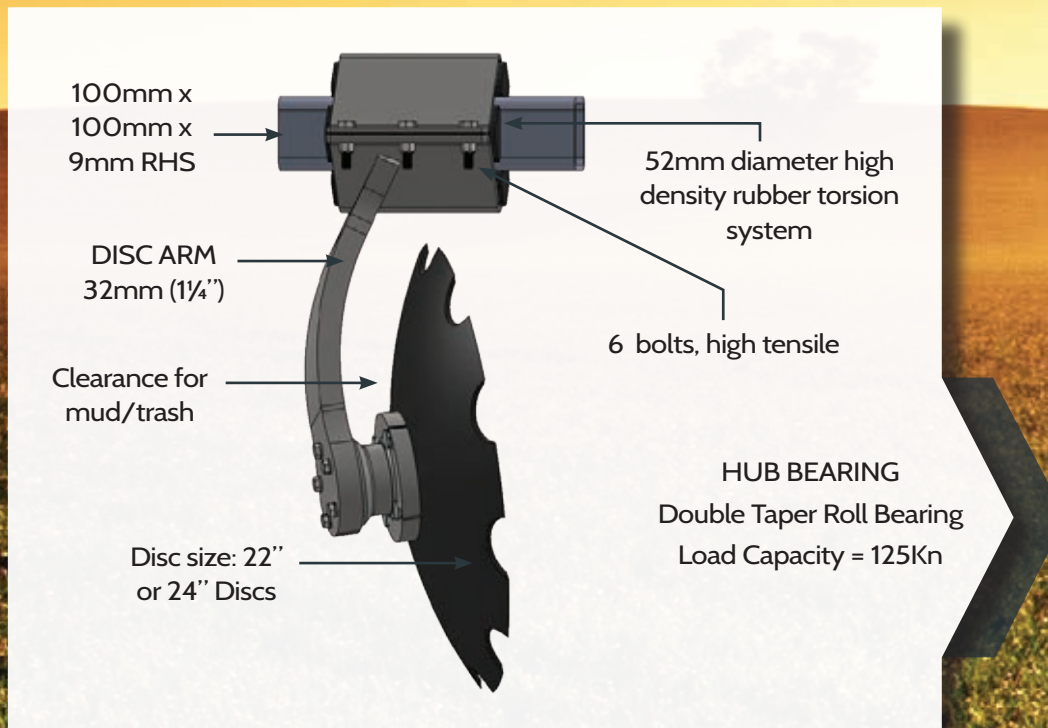

FARMER FRIENDLY MACHINE FEATURES

Highly
engineered
frame
structure

Rubber torsion
to absorb
roller shock

Heavy duty
industrial
cylinders



Extra
heavy duty
axle/hubs

Adjustable Soil Deflector – leaves a level finish on both sides of the machine, excellent for working up & back.

Heavy duty disc arms with rubber torsion action

Heavy duty roller bearing disc hubs protected by multiple sealing system (replaceable hubs)

Variety of Roller Options
available to suit your soil type



HOLLOW CRUMBLER ROLLER

Our most popular type of roller, designed to leave a beautiful level finish on your paddock, this roller is excellent in most soil types, and is very effective in loamy soils.




SPRING ROLLER

Heavy duty roller used mostly in sticky soils. Spring action loosens the dirt off the roller for superior operation in heavy trash conditions like corn and maize.


LATERAL FRONT DISC GANG ADJUSTMENT

SPEEDTILLER[®] ADJUSTABLE DISC SYSTEM



Front row of discs can be adjusted laterally for total soil disturbance, disc wear compensation & maximum weed control.

ALTERNATIVE NON-ADJUSTABLE DISC SYSTEM

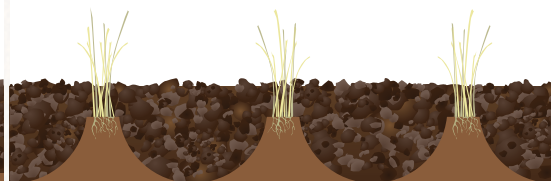

No lateral adjustment, leaving ridges under the soil unworked.

Speedtiller® Specifications



CODE	DESCRIPTION	OPERATING WIDTH APPROX.	TRACTOR POWER RANGE APPROX. (HP)	NO. OF DISCS	WEIGHT APPROX. WITH STD ROLLERS (kg)	TRANSPORT HEIGHT APPROX.	TRANSPORT WIDTH APPROX.	WHEEL EQUIPMENT
3 POINT LINKAGE								
2917D	3 Point Linkage	1.75m (5.7')	70- 85	14	1440		2.05m (6.7')	
2920D	3 Point Linkage	2.0m (6.6')	70- 90	16	1532		2.3m (7.5')	
2922D	3 Point Linkage	2.25m (7.4')	80- 100	18	1646		2.5m (8.2')	
2925D	3 Point Linkage	2.5m (8.2')	90-120	20	1790		2.6m (8.5')	
2930D	3 Point Linkage	3.0m (9.8')	110-140	24	2048		3.3m (10.8')	
2935D	3 Point Linkage	3.5m (11.5')	130-150	28	2356		3.8m (12.5')	
2940D	3 Point Linkage	4.0m (13.1')	150-220	32	2814		4.3m (14.1')	
2945D	3 Point Linkage	4.5m (14.8')	210-270	36	3472		4.8m (15.7')	
2955D	3 Point Linkage	5.5m (18')	260- 290	44	4188		5.8m (18.9')	
3 POINT LINKAGE, FOLDING WINGS								
2940F	Folding Wings	4.0m (13.1')	210-280	32	3704		2.5m (8.2')	
2945F	Folding Wings	4.5m (14.8')	230-300	36	3772		2.5m (8.2')	
UNIVERSAL								
2917U	Rigid Frame	1.75m (5.7')		14	1928		2.1m (6.7')	11.5/80 x15.3 16 Ply
2925U	Rigid Frame	2.5m (8.2')		20	2990		2.8m (9.2')	11.5/80 x15.3 16 Ply
2930U	Rigid Frame	3.0m (9.8')		24	3248		3.3m (10.8')	11.5/80 x15.3 16 Ply
2935U	Rigid Frame	3.5m (11.5')		28	3456		3.8m (12.5')	11.5/80 x15.3 16 Ply
2940U	Rigid Frame	4.0m (13.1')		32	3664		4.3m (14.1')	11.5/80 x15.3 16 Ply
TRAILING UNIT, FOLDING WINGS								
2940T	Folding Wings	4.0m (13.1')	130- 200	32	4500		2.5m (8.2')	400/60 x15.5
2945T	Folding Wings	4.5m (14.8')	150-230	36	4800		2.5m (8.2')	400/60 x15.5
2950T	Folding Wings	5.0m (16.4')	170-260	40	5000		2.5m (8.2')	400/60 x15.5
2960T	Folding Wings	6.0m (19.7')	200-280	48	6600	3.5m (11.5')	2.9m (9.5')	400/60 x15.5
2965T	Folding Wings	6.5m (21.3')	210- 300	52	6800	3.7m (12.1')	2.9m (9.5')	400/60 x15.5
2975T	Folding Wings	7.5m (24.6')	230-330	60	8400	3.9m (12.8')	3.5m (11.5')	400/60 x 22.5
2985T	Folding Wings	8.5m (27.9')	250- 350	68	9100	3.9m (12.8')	4.5m (14.8')	400/60 x 22.5

Please note: Tractor Power Range is indicative only, and changes according to application. These specifications are subject to change without prior notice.

SPEEDTILLER[®]
By K-Line Ag



Design excellence and extensive field testing, under the harshest and most demanding conditions, is what makes the Speedtiller[®] a superior world class machine...



Sustaining Farms to Sustain the World

FREE CALL: 1800 194 131
www.k-line.net.au